

LED Cylindrical Wall Sconce



Project:

Location:

Catalog #:

Quantity:

Features

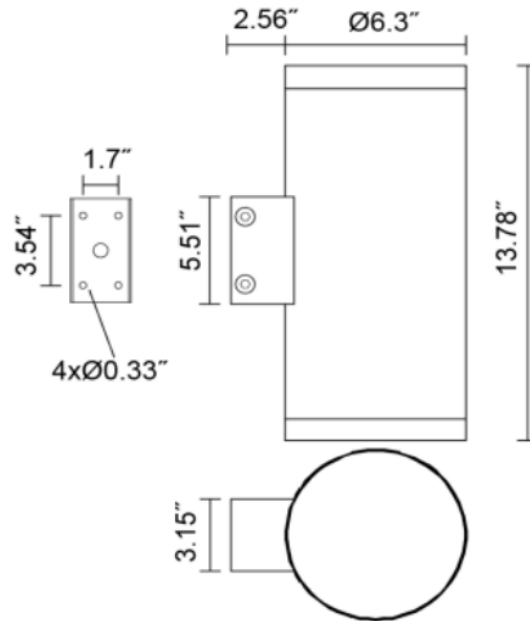
Teslyte ET6018 Series is a contemporary and stylish cylindrical wall sconce that features both uplight and downlight. The ET6018 wall sconce is designed to provide exceptional illumination and performance and its modern shape blends into the surroundings making it the ideal choice for illuminate and enhance building exteriors and interiors.

- **Housing:**
 - Extruded aluminum housing
 - Die casting aluminum cover ring and base.
 - Stainless steel screws and plate.
 - Imported silicon rubber ring.
- **Finish:**
 - Powder coat finish that provides superior resistance to corrosion and weathering.
- **Lens:**
 - High intensity tempered glass.
- **Optics:**
 - High power led 3-step MacAdam Ellipse
 - Optics are engineered for superior field-to-beam ratio.
- **LEDs:**
 - Integral highly efficient LED module and driver.
 - Input Voltage: 100-277 V_{AC} (50/60 Hz)
- **Applications:**
 - Suitable for outdoor and indoor for Residential or Commercial
- **Mounting:** wall mount
- **Ratings:**
 - Suitable for wet locations. IP 65.
 - 5-year warranty

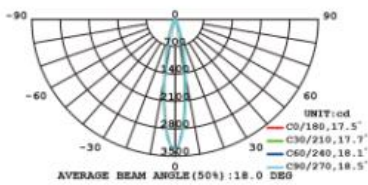
Ordering Information

Product code	Power	CCT (K)	Ra	Beam Angle	Finish	Optional
ET6018	C22		80			
Universal Voltage 120V-277Vac	C22 - 11W x2	3 - 3000K 4 - 4000K 6 - 6000K	80 - Ra80	05 - 5° 15 - 15° 25 - 25° 45 - 45° 60 - 60°	B - Black W - White G - Gray Z - Mineral Bronze S - Silver	T - 20° Tilt M - Marine ambient corrosion resistance DMG - 0-10V Dimming MT - Mounting plate for standard junction box

Note: Fixtures must be grounded in accordance with national, state, and/or local electrical codes. Failure to do so may result in serious personal injury

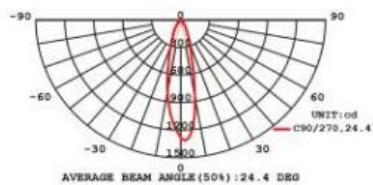
Mechanical Dimensions

Photometric

TL-ET6018-C22-3-15
 LED luminous flux: 795lm x2
 Luminaire flux: 545lm x2
 Beam angle 15



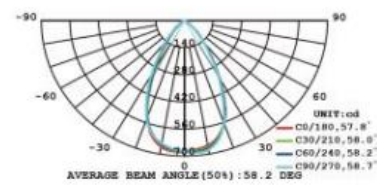
One side light distribution

TL-ET6018-C22-3-25
 LED luminous flux: 795lm x2
 Luminaire flux: 415lm x2
 Beam angle 25



One side light distribution

TL-ET6018-C22-3-60
 LED luminous flux: 795lm x2
 Luminaire flux: 675lm x2
 Beam angle 60



One side light distribution