

## LED Square Wall Sconce



Project:

Location:

Catalog #:

Quantity:

### Features

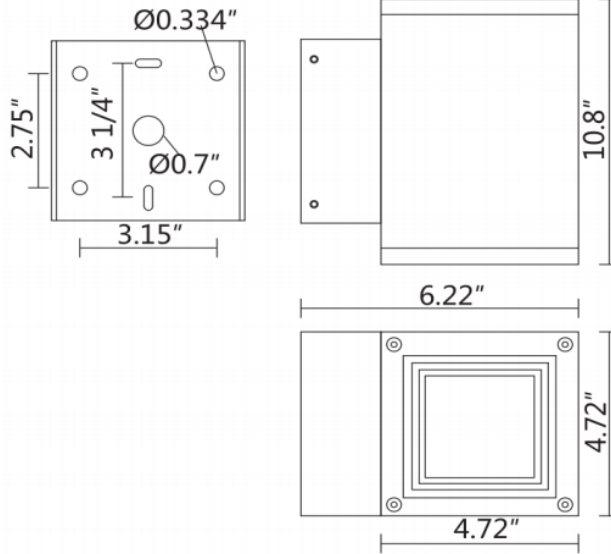
Teslyte ET6161 Series is a small, contemporary and stylish square wall sconce that features both uplight, downlight or both up and downlight. The ET6161 wall sconce is designed to provide exceptional illumination and performance and its modern shape blends into the surroundings making it the ideal choice for illuminate and enhance building exteriors and interiors.

- **Housing:**
  - Extruded aluminum housing
  - Die casting aluminum cover ring and base.
  - Stainless steel screws and plate.
  - Imported silicon rubber ring.
- **Finish:**
  - Powder coat finish that provides superior resistance to corrosion and weathering.
- **Lens:**
  - High intensity tempered glass.
- **Optics:**
  - High power led 3-step MacAdam Ellipse
  - Optics are engineered for superior field-to-beam ratio.
- **LEDs:**
  - Integral highly efficient LED module and driver.
  - Input Voltage: 100-277 V<sub>AC</sub> (50/60 Hz)
- **Applications:**
  - Suitable for outdoor and indoor for Residential or Commercial
- **Mounting:** wall mount
- **Ratings:**
  - Suitable for wet locations. IP 65.
  - 5-year warranty

### Ordering Information

Product code	Power	CCT (K)	Beam Angle	Ra	Finish	Optional
<input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>
<b>ET6119</b>	<b>C8 - 4W x2</b>	<b>3 - 3000K</b> <b>4 - 4000K</b> <b>6 - 6000K</b>	<b>15 - 15°</b> <b>23 - 23°</b> <b>38 - 38°</b> <b>45 - 45°</b> <b>60 - 60°</b>	<b>80 - Ra80</b> <b>90 - Ra90</b>	<b>B - Black</b> <b>W - White</b> <b>G - Gray</b> <b>Z - Mineral</b> <b>S - Silver</b> <b>Bronze</b>	<b>T - 20° Tilt</b> <b>M - Marine ambient</b> corrosion resistance
<b>ET6119D -</b> Downlight	<b>C4 - 4W</b>					
<b>ET6119U -</b> Uplight						

Note: Fixtures must be grounded in accordance with national, state, and/or local electrical codes. Failure to do so may result in serious personal injury

**Mechanical Dimensions**

**Photometric**

**TL-ET6119-C8-3-15-80-G**  
 LED luminous flux:  
 Luminaire flux: 730lm  
 Beam angle 15

