

Ingrade Linear Uplight ET8542

Project:

Location:

Catalog #:

Quantity:



Features

Teslyte ET8542 is in-ground luminaire that is designed to be durable and high performance with optimized heat dissipation while offer a clean architectural design. ET8542 can be installed in any concrete pavement and lawn. It is engineered to be suitable for walk-over and can withstand any weather conditions.

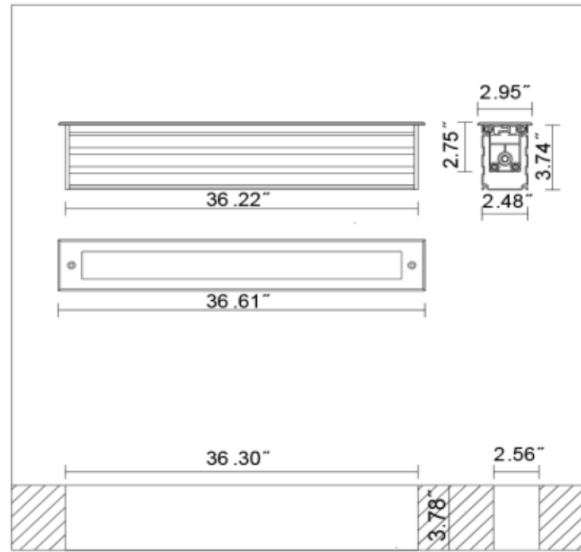
- Housing:
 - Extruded aluminum housing.
 - Die-casting aluminum end caps
 - Stainless steel screws and cover frame.
 - Silicon rubber gasket
- LEDs
 - Integral highly efficient LED module and driver
- Optical Lens:
 - High intensity tempered glass top cover
 - Optic are engineered for superior field-to-beam ratios
 - Fixtures are available with different beam angle
- Finish
 - Powder coat finish that provides resistance to corrosion and weathering
- Application:
 - Highlighting objects, sculptures, trees, brushes, walls and columns
- Warranty:
 - IP67 - Suitable for wet locations
 - 5 years warranty



Ordering Information

Product code	Power	CCT (K)	Beam angle	Ra	Cover Ring	Optional
ET8542	-	-	-	80	-	-
Input Voltage: 100-277Vac	C28 - 28W	3 - 3000K 4 - 4000K 6 - 6000K	05 - 05° 15 - 15° 25 - 25° 45 - 45° 60 - 60° 3515 - H35° xV15° 6010 - H60° xV10°	80 - Ra80	S4 - 304 Stainless Steel S6 - 316 Stainless Steel	T - 15° Tilt to wall M - Marine ambient corrosion resistance DMG - 0-10V dimming DC - Daisy chain wiring
24Vdc for RGBW		R - Red G - Green B - Blue RGB - R.G.B.				

Note: Fixtures must be grounded in accordance with national, state, and/or local electrical codes. Failure to do so may result in serious personal injury

Mechanical Dimensions

Photometric

IN-ET8542-C28-3-05-80-S4
 LED luminous flux: 2160lm
 Luminaire flux: 1977lm
 Beam angle 5

IN-ET8542-C28-3-15-80-S4
 LED luminous flux: 2160lm
 Luminaire flux: 1122lm
 Beam angle 15

