

## CATENARY RGB LED



### Features

Teslyte CL-CF cylindrical LED series offers a minimalist lighting solution with a stylish shape that integrates seamlessly into any architectural environment. The CL-CF cylindrical LED luminaires are ideal for creating a warm, pleasant, and an exceptionally well illuminated environment that appear more inviting and professional.


- Construction:
  - Extruded aluminum housing with frosted acrylic lens provide evenly lamination all around
  - Properly secure all components within the housing
  - Housing finish with powder coat silver or any standard RAL color
- LED Module:
  - RGB 28W LED
- Applications:
  - Streetscapes, parks, campuses, and gathering areas
- Mounting:
  - Many different mounting hardware available. Consult Factory.
- Ratings:
  - Suitable for wet locations
- Warranty:
  - 5 years


### Ordering Information

Product code	Voltage	Distribution	Wattage	CCT (K)	Finish	Optional
<input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>
Integral Driver <b>CL-CF3I</b> 3ft. nom. (44.50") <b>CL-CF4I</b> 4ft. nom. (56.50")	<b>U</b> - Universal (120-277 Vac)	<b>S</b> - Symmetrical	Up to 40W	<b>30</b> - 3000K <b>35</b> - 3500K <b>40</b> - 4000K <b>RGB</b>	<b>BL</b> - Black <b>BR</b> - Bronze <b>SL</b> - Silver <b>RAL Color</b>	<b>ND</b> - Non Dimming <b>D</b> - 0-10V Dimming <b>DMX</b> - DMX Controller <b>JC</b> - Quick Connect Jumper Cord <b>QC3</b> - Quick Connector 3-way
Remote Driver <b>CL-CF3R</b> 3ft. nom. (40.50") <b>CL-CF4R</b> 4ft. nom. (52.50")						

Note: Fixtures must be grounded in accordance with national, state, and/or local electrical codes. Failure to do so may result in serious personal injury

### Options and Accessories

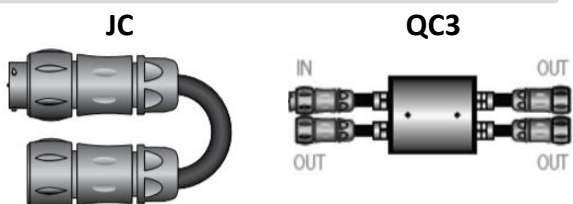

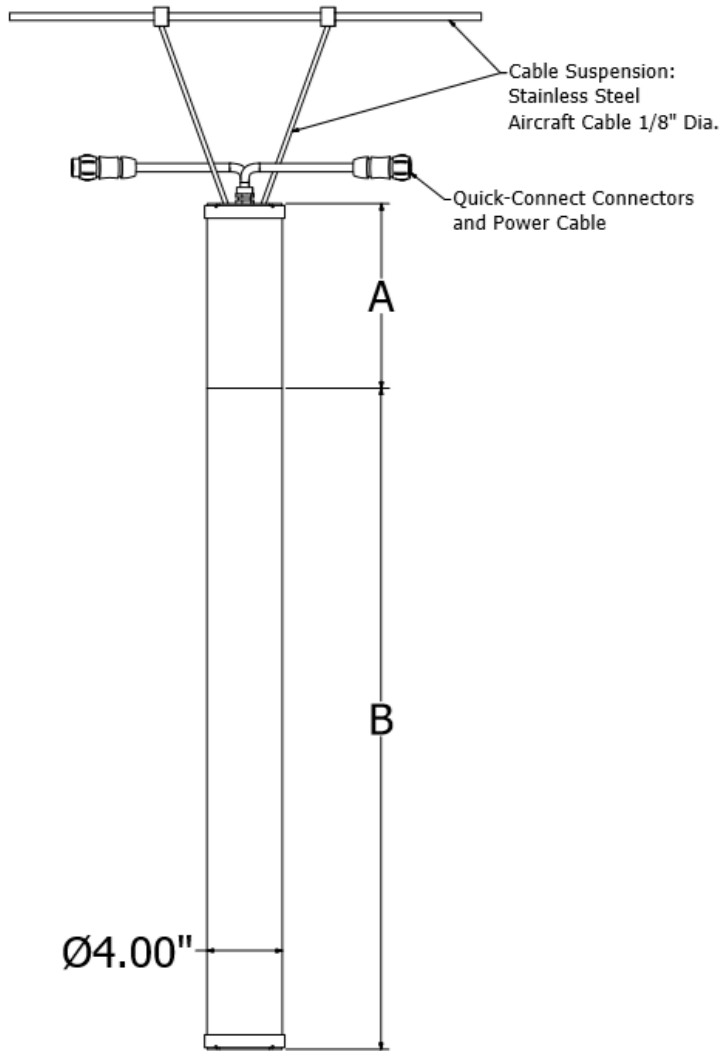**Mechanical Dimensions**


	A	B
<b>CL-CF3I</b>	8.5 in.	3.00 ft.
<b>CL-CF4I</b>	8.5 in.	4.00 ft.
<b>CL-CF3R</b>	4.5 in.	3.00 ft.
<b>CL-CF4R</b>	4.5 in.	4.00 ft.