



TESLYTE

Luminaire

Commercial Lighting Solutions

SOLUTIONS OVERVIEW: To provide uniform lighting solutions for pedestrian scale, pathway, landscape, wall sconce, area and site



PEDESTRIAN

FLORENCE FAMILY

> Post Top & Wall Sconce

BARCELONA FAMILY

> Pole Mount & Bollard

TUSCANY FAMILY

> Pole Mount & Bollard



PATHWAY

MILAN FAMILY

NEW

> Cylinder Pole Mount
> Cylinder Bollard



LANDSCAPE

SEDONA FAMILY

NEW

> Cylinder Landscape



WALL SCONCE


DURANGO FAMILY

NEW

> Cylinder Wall Mount

VOLGA FAMILY

> Wall Sconce

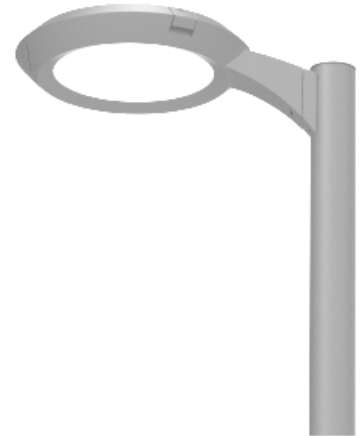

AREA & SITE

LAGUNA FAMILY

> High Performance
> Architectural
> Buy American Act Compliant

CUSTOM

> Custom Projects



TESLYTE


Florence Family

Pedestrian Post Top & Wall Sconce

APPLICATION	SERIES	FEATURES	CERT.	TESLYTE ADVANTAGE
Pedestrian Post Top	PT-TD	Wattages: up to 80W Voltage: 120V-277V Distribution: T3, T5 CRI > 80 CCT: 3000K, 4000K, 5000K	MADE IN USA CLASSIFIED UL US	> Designed to reduce glare and superior photometric performance > Real-time performance monitoring with Smart LED chip option
	WS-TA	Wattages: up to 36W Voltage: 120V-277V Distribution: Symmetrical CRI > 80 CCT: 3000K, 4000K, 5000K	MADE IN USA CLASSIFIED UL US	> 4 - 6 week lead time > Custom decorative screen panel

FEATURED PROJECTS

> Natren Probiotics, Thousand Oaks, CA.

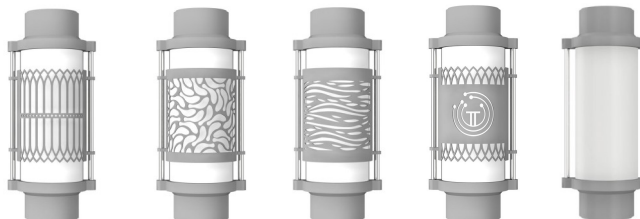






TESLYTE

Barcelona Family

Pedestrian Pole Mount & Bollard








APPLICATION	SERIES	FEATURES	CERT.	TESLYTE ADVANTAGE
Pedestrian Pole Mount	PM-BF	Round tapered pole Height: 8 feet Wattages: up to 60W Voltage: 120V-277V Distribution: Symmetrical	MADE IN USA 	> High product quality and robust design > Reduced maintenance costs > Real-time performance monitoring with Smart LED chip option
	BL-BF	CCT: 3000K, 4000K, 5000K		
Decorative Bollard		Wattages: up to 36W Voltage: 120V-277V Distribution: Symmetrical	MADE IN USA 	> High product quality and robust design > Emergency power pack option > Real-time performance monitoring with Smart LED chip option
		CCT: 3000K, 4000K, 5000K		
Wall Mount	WM-BF	Wattages: up to 36W Voltage: 120V-277V Distribution: Symmetrical CCT: 3000K, 4000K, 5000K	MADE IN USA 	> High product quality and robust design > Real-time performance monitoring with Smart LED chip option



TESLYTE

Tuscany Family

Pedestrian Post Top & Bollard







APPLICATION	SERIES	FEATURES	CERT.	TESLYTE ADVANTAGE
Pedestrian Post Top	PT-ED 	Wattages: up to 58W Voltage: 120V-277V Distribution: Symmetrical CCT: 3000K, 4000K, 5000K		> IP66 rated housing > Corrosion resistant aluminum > Affordable lighting solution
	PT-ED 	Wattages: up to 58W Voltage: 120V-277V Distribution: Symmetrical CCT: 3000K, 4000K, 5000K		> IP66 rated housing > Corrosion resistant aluminum > Affordable lighting solution
Decorative Bollard	BL-ED 	Wattages: Up to 36W Voltage: 120V-277V Distribution: Symmetrical CCT: 3000K, 4000K, 5000K	 	> Emergency power pack option > Real-time performance monitoring with Smart LED chip option



TESLYTE

Volga Family

Wall Sconces







APPLICATION	SERIES	FEATURES	CERT.	TESLYTE ADVANTAGE
Decorative Wall Sconce	WS-PL 	Size: 28" H x 8.75" W x 5.5" D 13.75" H x 8.75" W x 5.5" D Wattages: 28W Voltage: 120V-277V CCT: 3000K, 4000K		> 4 - 6 week lead-time
	WS-PL 	Size: 26" H x 9.75" W x 7" D 13.75" H x 9.75" W x 7" D Wattages: 28W Voltage: 120V-277V CCT: 3000K, 4000K		> 4 - 6 week lead-time
	WS-PL 	Size: 27" H x 8" W x 5" D 15" H x 8" W x 5" D Wattages: 28W Voltage: 120V-277V CCT: 3000K, 4000K		> 4 - 6 week lead-time > Up/down light option



TESLYTE

Laguna Family

Area & Site





APPLICATION	SERIES	FEATURES	CERT.	TESLYTE ADVANTAGE
High Performance	SB-QL 	Wattages: 167W, 256W Voltage: 120V-277V or 480V Distribution: T3, T5 CCT: 3000K, 4000K, 5000K		> 2-week lead-time
Architectural Design	SB-ER 	Wattages: up to 58W Voltage: 120V-277V Distribution: Symmetrical CCT: 3000K, 4000K, 5000K		> IP66 rated housing > Corrosion resistant aluminum
Buy American Act Compliant	SB-TY 	Wattages: 100W, 150W Voltage: 120V-277V or 480V Distribution: T3, T5 CCT: 3000K, 4000K, 5000K		> Buy American Act complaint



TESLYTE

Custom Design

4 - 8 Weeks Custom Design Case Studies

CUSTOM	DESIGN TIME	FEATURED PROJECTS
	<ul style="list-style-type: none">> Design and expedite within 2 weeks> 12V Dual-channel red/green LED> Ideal for clean room, test lab and bank door	<ul style="list-style-type: none">> Applied Medical, CA.
	<ul style="list-style-type: none">> Design to production in 4 weeks> UL approved and certified> Full photometric report> Emergency Battery Backup option	<ul style="list-style-type: none">> Sylmar Court Apartment, CA.> Mammoth Friendship Baptist Church, CA.
	<ul style="list-style-type: none">> Design to production in 6 weeks> UL approved and certified> Full photometric report	<ul style="list-style-type: none">> Mayfield Catholic Private School, CA.
	<ul style="list-style-type: none">> Design to production in 8 weeks> UL approved and certified> Full photometric report	<ul style="list-style-type: none">> Los Alisos Village, CA.