

Decorative Bollard

Project:

Location:

Catalog #:

Quantity:



Features

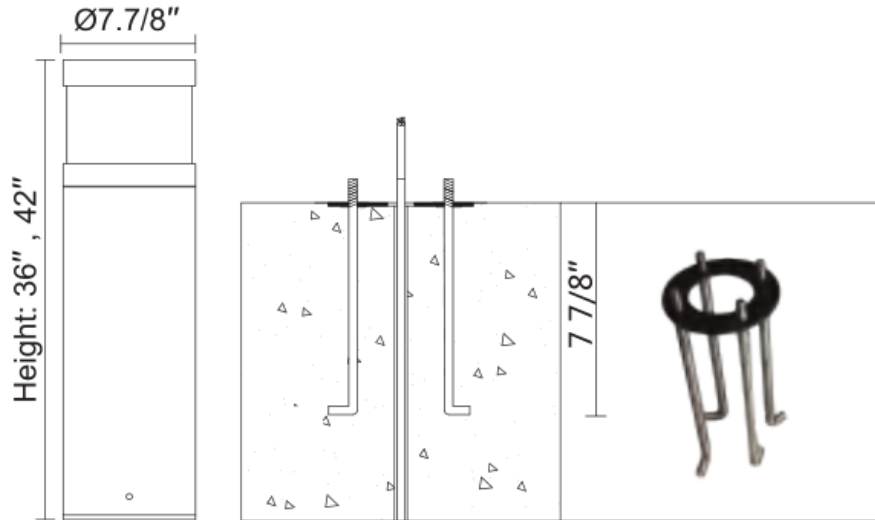
Teslyte ET5028 models are corrosion-resistant aluminum cylindrical bollard with uniform 360° light distribution. These bollards are ideal for illuminating pathways and complementing building exteriors and parks.

- **Housing:**
 - Extruded aluminum housing and die cast aluminum housing top
 - Stainless steel screws and aluminum base plate
 - Silicone rubber ring and polycarbonate cover
- **Finish:**
 - Powder coat finish that provides superior resistance to corrosion and weathering.
- **Lens:**
 - Glass ring lens that spreads full 360° for open areas
 - Uniform distribution
- **LEDs:**
 - Integral highly efficient LED module.
 - High performance driver with all around protection: over-heating, short-circuit and over load protections
 - Input Voltage: 120 - 277 V_{AC}, 50Hz/60Hz
- **Applications:**
 - Suitable for pedestrian walkways for Residential or Commercial
- **Mounting:**
 - Mounting plate with anchor bolts for concrete anchor
- **Ratings:**
 - Suitable for wet locations. IP 65
 - 5-year warranty

Ordering Information

Product code	Power - Height	Diameter	CCT (K)	Ra	Finish	Optional
ET5028		8		80		
	C20-36 - 20W-36" H. C35-36 - 35W-36" H. C35-42 - 35W-42" H.	8 - 7.875"	3 - 3000K 4 - 4000K 6 - 6000K	80 - Ra80	B - Black W - White G - Gray Z - Mineral Bronze S - Silver	M - Marine ambient corrosion resistance DMG - 0-10V dimming (for 20W only)

Note: Fixtures must be grounded in accordance with national, state, and/or local electrical codes. Failure to do so may result in serious personal injury

Mechanical Dimensions


Four anchor bolts included (standard)

Photometric

ET5028-C20-36-8-3-80-B
 LED luminous flux: 3484lm
 Luminaire flux: 1225lm
 Beam angle

