

## Wall Sconce LED Luminaire



Project:

Location:

Catalog #:

Quantity:

### Features

Teslyte WS-TAPL series, available in 13.75" and 26" in heights, has matte opal acrylic lens and bronze finish which blend with any decorative or architectural setting. Constructed of seamless, heavy-duty aluminum to withstand any weather. The WS-TAPL wall mount series is the marriage of classic design and modern contemporary styling. Its overall elegant appearance brings a desired organic look into the building exteriors.

- Housing:
  - Made of thick corrosion resistant aluminum
  - Powder coat bronze or silver finish
- LEDs
  - Integral highly efficient LED module and driver
- Lens
  - Matte opal acrylic
- Mechanical dimensions
  - 26" H x 9.75" W x 7" D
  - 13.75" H x 9.75" W x 7" D
- Application: Commercial outdoor
- Warranty:
  - UL listed, suitable for wet location
  - 5 years warranty



### Ordering Information

Product code	Voltage/Distribution	Wattage	CCT (K)	Finish	Optional
<input type="text"/>	<input type="text" value="US"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
<small><sup>(1)</sup> Use fixture height options table for product code i.e. WS-TAPL-26</small>	<b>US- 120-277V / Symmetrical Distribution</b>	<small><sup>(2)</sup> Use wattage options below for product wattage i.e WS-TAPL-26: 36W</small>	<b>30 - 3000K 40 - 4000K 50 - 5000K</b>	<b>BR - Bronze SL - Silver</b>	<b>N - No option D - Dimmable P - Photo sensor</b>

Note: Fixtures must be grounded in accordance with national, state, and/or local electrical codes. Failure to do so may result in serious personal injury

### Fixture Height Options

### Light Distribution

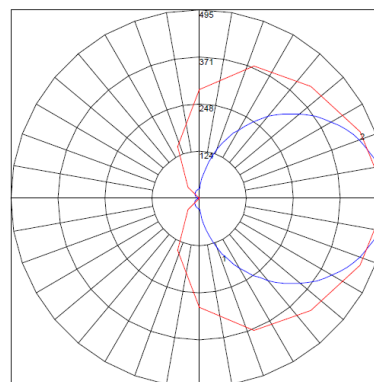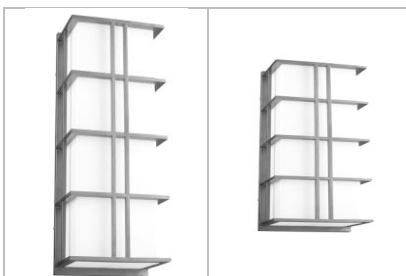

Luminaire Efficacy Rating (LER) 84  
 Maximum Candela 495.18  
 Maximum Candela Angle 0H 87.5V  
 Cutoff Classification (deprecated) Non-Cutoff

<sup>(1)</sup> Product family code	<b>WS-TAPL-26</b> (26" height)	<b>WS-TAPL-13</b> (13.75" height)
<sup>(2)</sup> Wattage	36W- 4000 lms	28W- 3000 lms