

## Wall Sconce LED Luminaire

Project: Location:

Catalog #: Quantity:

### **Features**


Teslyte WS-TA Series Wall Sconce features a variety of decorative screen panel options, combined with contemporary styling, constructed to withstand and outlast the elements. The WS-TA series sets a new standard for decorative wall sconce luminaires and adds a contemporary feel to building exteriors.

### • Housing:

- Made of thick corrosion resistant aluminum
- Solid aluminum trusts for structure integrity, and as an architectural design element
- Properly secure all components within the housing.
- Reflector:
  - Formed aluminum with high reflectance white paint
- Finish:
  - Powder coat finish that provides superior resistance to corrosion, weathering, and scratches.
- - Extruded opal translucent, UV stable acrylic.
  - UL-94 HB flame rated 0
- LEDs:
  - Integral highly efficient LED module and driver.
- Applications:
  - Commercial outdoor
- Mounting: Wall mount over standard junction box (by others) with provided hardware

**C** - Custom

- Ratings:
  - Suitable for wet locations
  - 5-year warranty





Distribution

# **Ordering Information**


Product code Voltage/Distribution Wattage CCT (K) Finish Optional US <sup>(1)</sup> Use Decorative **US** – Universal 36 - 36W **30**- 3000K **BR** - Bronze N - No Options screen panel options (4000 lms) **40**- 4000K **D** - Dimmable Voltage/ **GR** - Gray table for product code **50**- 4000K Symmetrical P - Photo Sensor i.e. WS-TABL-27: no

Note: Fixtures must be grounded in accordance with national, state, and/or local electrical codes. Failure to do so may result in serious personal injury


screen panel



## **Decorative Screen Panel Options**

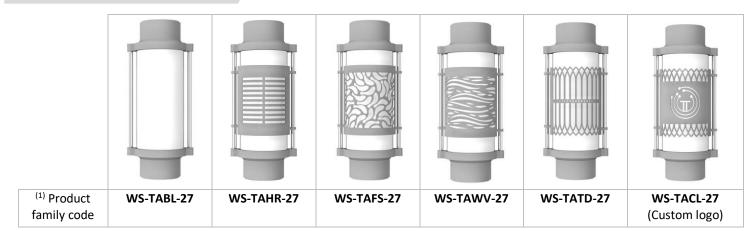

## **Mechanical Dimensions**

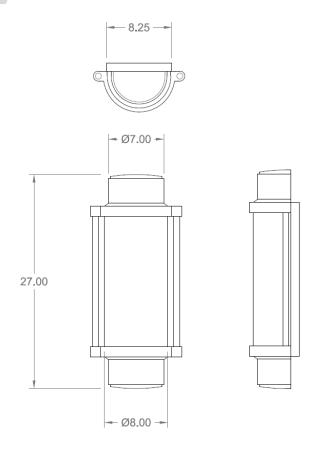



## **Light Distribution**

