

**Landscape Bullet TL7069**

Project:

Location:

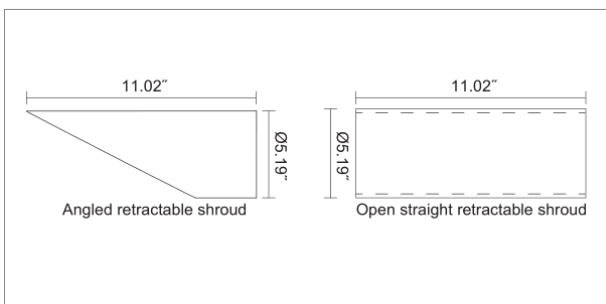
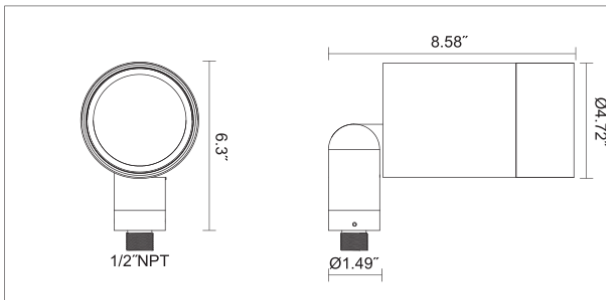
Catalog #:

Quantity:


**Features**

Teslyte TL7069 model is a dimmable LED landscape bullet with an adjustable 180° tilt and 360° rotation. Various beam patterns, louvers, and retractable angle or straight shrouds can be combined to create multiple lighting effects and suitable for any landscape illumination, sign lighter, or other area and architectural accenting needs.

- Housing:
  - Die-casting aluminum housing and cover ring
  - Silicon rubber gasket
  - Powder coat finish that provides superior resistance to corrosion and weathering.
- Optical Lens:
  - High Intensity Tempered glass.
  - A variety of beam angles
- LEDs:
  - Highly efficient integral COB LED and driver.
- Applications:
  - Landscape, architectures, buildings and outdoor areas.
- Ratings:
  - IP65 - Suitable for wet locations.
- Warranty: 5-year warranty.

**Mechanical Dimensions & Technical Features**

**Input Voltage: 120Vac only (without dimming/Triac dimming)**
**120-277Vac (with dimming)**
**Lumen Output:**







	2700K	3000K	3500K	4000K
<b>15W</b>	1560	1627	1655	1668
<b>18W</b>	1854	1932	1966	1982
<b>24W</b>	2112	2196	2229	2230

**Ordering Information**

Product code	Wattage	CCT	Beam Angle	Ra	Shroud	Finish	Mounting/Option
<b>TL7069</b>	-	-	-	-	-	-	-
Input Voltage: 120 Vac	<b>C15</b> - 15W <b>C18</b> - 18W <b>C24</b> - 24W	<b>27</b> - 2700K <b>30</b> - 3000K <b>35</b> - 3500K <b>40</b> - 4000K	<b>15</b> - 15° <b>25</b> - 25° <b>40</b> - 40° <b>AH</b> - H55° x V20° <b>AV</b> - H20° x H55°	<b>80</b> - R80 <b>90</b> - R90	<b>NS</b> - No Shroud <b>AS</b> - Angled Retractable Shroud <b>OS</b> - Open Retractable Shroud	<b>B</b> - Black <b>W</b> - White <b>G</b> - Gray Bronze <b>S</b> - Silver	<b>-KAJ</b> <b>-KAS</b> <b>-KPC</b> <b>-KPS</b> <b>-KAT</b> <b>-KAC</b>  <b>H</b> - Honey-comb Louver  <b>C</b> - Color filter (consult factory)

Note: Fixtures must be grounded in accordance with national, state, and/or local electrical codes. Failure to do so may result in serious personal injury

**Mounting Options**
**Mounting with 0–10V Dimming option**

<b>-KAJ</b>  Junction Box mounting <small>Junction Box (provided by other)</small>	<b>-KAS</b>  Stake mounting	<b>-KPC</b>  Power pile with conduit	<b>-KPS</b>  Power pile with stake
<b>-KAC</b>  Canopy mounting	<b>-KAT</b>  Tree ring		
<b>Note:</b> <ul style="list-style-type: none"> <li>Wiring compartment, stake, power pile, tree ring and canopy are accessories.</li> <li>Different size and shape of the stake, power pile, tree ring and canopy are available, contact manufacturer representative for details.</li> </ul>			